



SEMI MOUNTABLE KERB DETAIL
SCALE 1:10

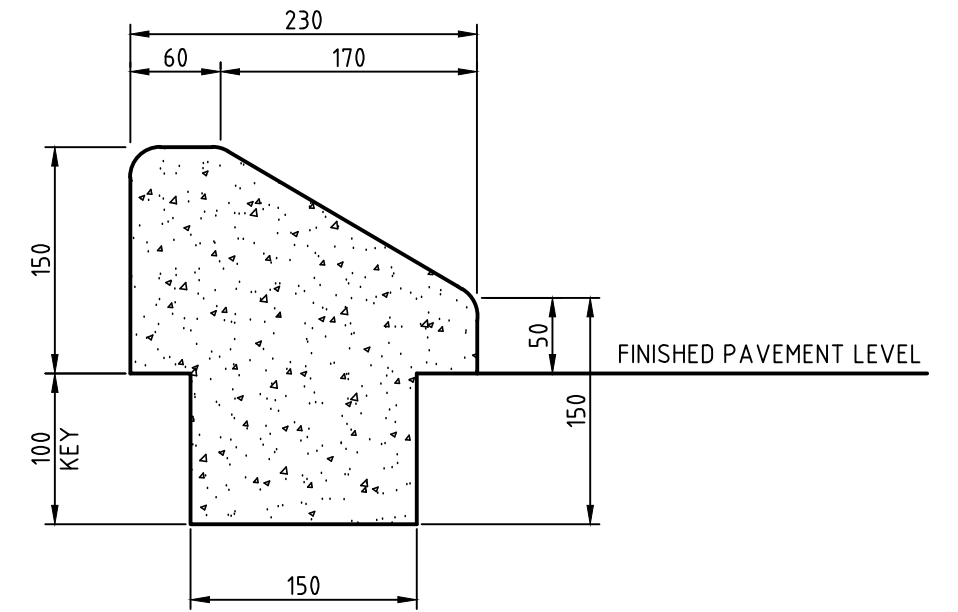

SEMI MOUNTABLE KERB DETAIL (KEYED)
SCALE 1:5
SEE NOTE 9

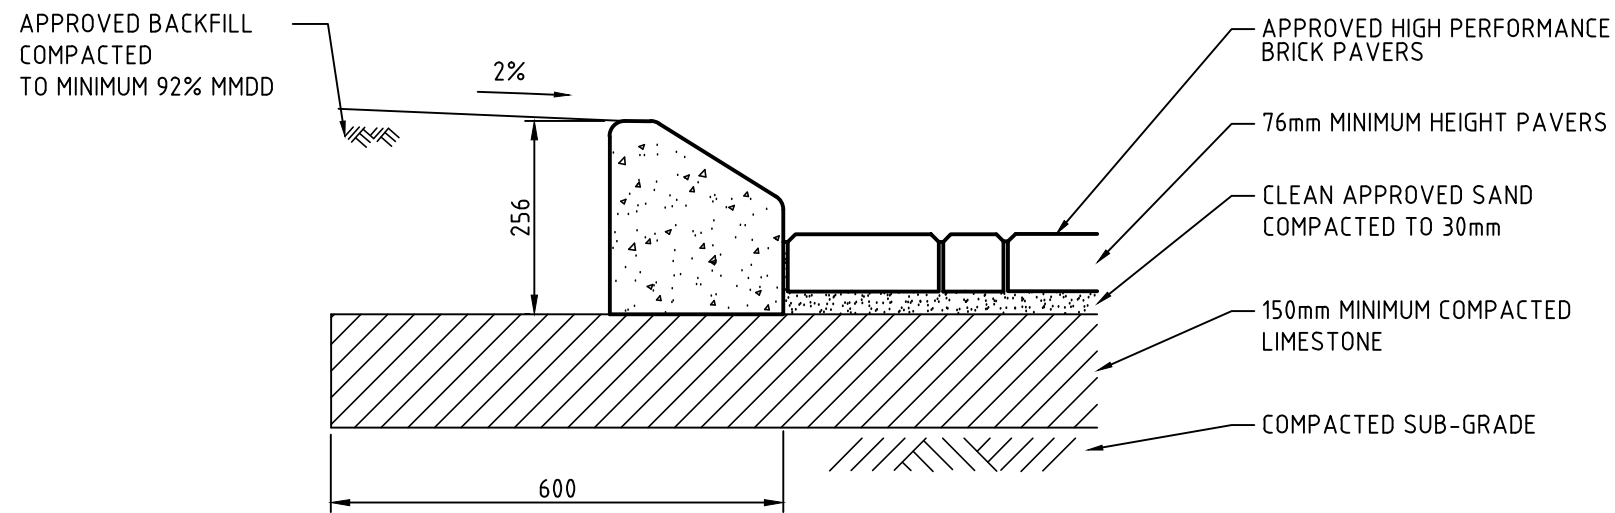

SEMI MOUNTABLE KERB FOR BRICK PAVING
SCALE 1:10

NOTES:

1. ASPHALT THICKNESS TYPICALLY 25mm AC7. WHEN 30mm AC10, ADJUST KERB HEIGHT ACCORDINGLY
2. CONTRACTION JOINTS AT 2.0m CENTRES
3. EXPANSION JOINTS AT 50.0m CENTRES
5. KERB JOINTS TO COINCIDE WITH FOOTPATH JOINTS
6. ALL KERB PROFILE RADII ARE 20mm UNLESS OTHERWISE ADVISED
6. KERBING TO BE EXTRUDED USING 32MPa GRADE CONCRETE IN ACCORDANCE WITH AS1379 WITH FIBRE REINFORCEMENT AT A MIXING RATE OF 1kg/m³
7. KERB TO BE BOXED IN AFTER PRIME SEAL. BOXED EDGES TO BE RESEALED AFTER KERBING HAS BEEN PLACED
8. ALL KERBING ON A KERB ALIGNMENT RADIUS OF LESS THAN 40m SHALL BE KEYED

AMENDMENTS	REVISION	DATE	DESCRIPTION	BY	CHECKED	APPROVED
	1	22/12/10	CHANGE INCORRECT DIMENSION	GL	JG	MB

- GENERAL NOTES**
1. THIS DRAWINGS ALWAYS REMAINS THE PROPERTY OF THE CITY OF GOSNELLS AND MUST NOT BE RETAINED OR REPRODUCED WITHOUT PERMISSION
 2. IN THE ABSENCE OF THE APPROVED SIGNATURE (ie MANAGER TECHNICAL SERVICES) THIS DRAWING SHALL BE TREATED AS PRELIMINARY
 3. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS NOTED OTHERWISE

CITY OF GOSNELLS

2120 Albany Highway Gosnells 6110
PO Box 662, GOSNELLS 6990
WESTERN AUSTRALIA

Telephone 08 9397 3000
Facsimile 08 9397 3333
Online www.gosnells.wa.gov.au

STANDARD DRAWING
SEMI MOUNTABLE KERB

DESIGN	DRAWN YS	DRAWING A3
SCALE AS SHOWN	CHECKED MB	DATE 22/08/07

STANDARD DRAWING NUMBER
ES-35B
MANAGER TECHNICAL SERVICES
M. Botte
M. BOTTE